

# Doors and accesories for loading docks

■ Roller shutter | ■ Sectional | ■ Dock shelter | ■ Hydraulic platforms



# Insulated roller shutter doors



**Leaf** made of injected aluminium sheets with thermal break for positive temperatures until 3°C. PUR-Insulation with a density of 40-45 kg/m<sup>3</sup>.

**Vertical guides** made of white painted aluminium prepared to be fixed to panel or brickwall.



**Hardware** made of stainless steel.

**Electronic automatic drive** for opening and closing included.

**Accessories:** colors according to color card.





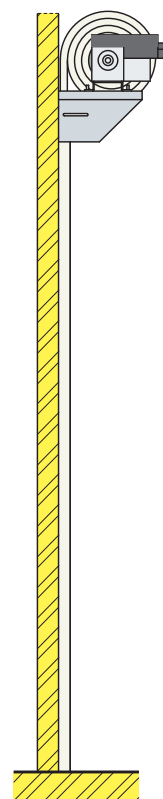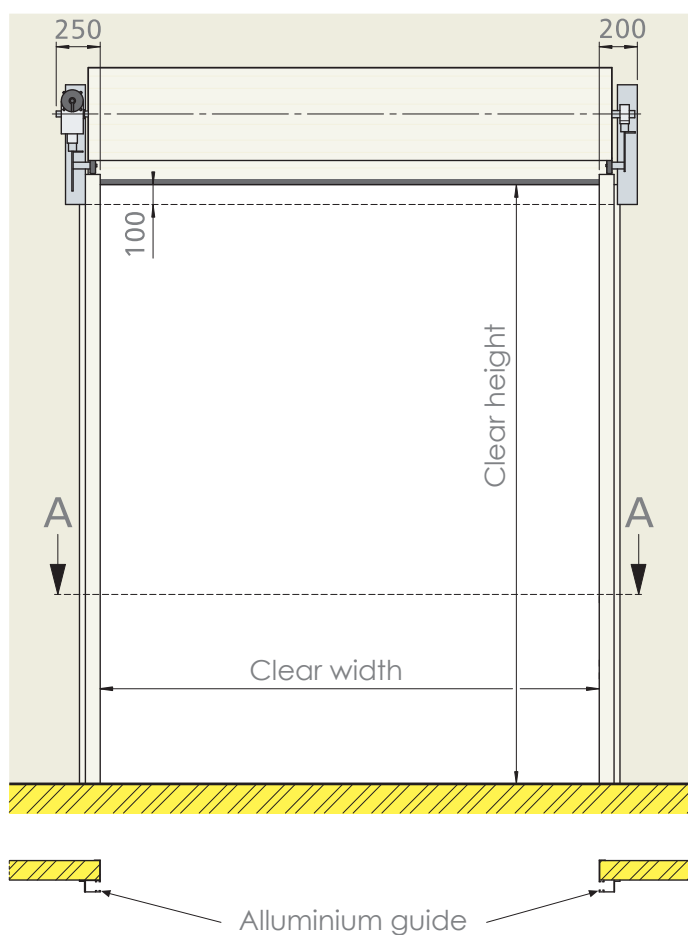

## Electronic of automatic drive



# Sectional doors



**Leaf:** thicknesses of 40 mm / 80 mm


- Finished in white painted steel
- PUR insulation with a density of 40-45 kg/m<sup>3</sup>
- Weight compensated by spring support for an easy manual opening and closing
- Bottom gasket

**Guides** painted in white with different elevation options which adapt tailor-made to any requirement: standard elevation, high elevation and vertical elevation


**Automatic drive** optional

**Accessories:** colors according to color card, vision panels, locks, etc




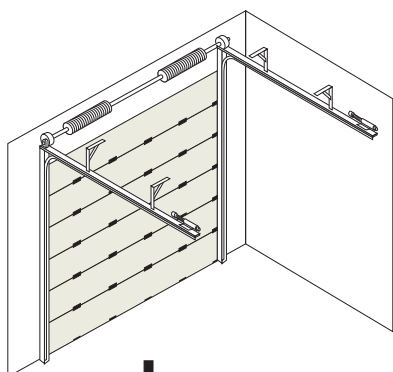


STANDARD LIFT

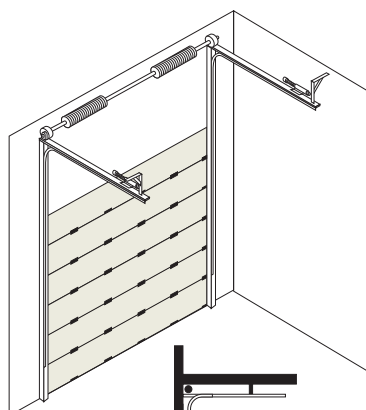

HIGH LIFT

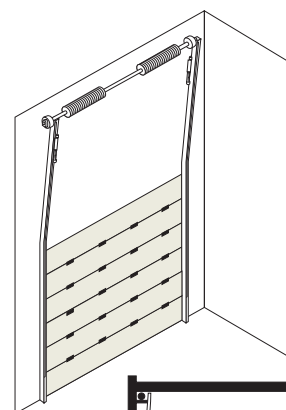

VERTICAL LIFT

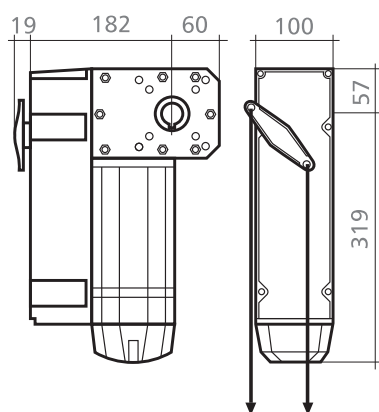

MOTOR	SAD
Power	0,37 kw
Nominal current	2,1 A
Service tension	400 V - 50 Hz
Working tension	24 V
Functioning factor	60%
Protection class	IP 54
Motor par	100 Nm
Revolutions per minute	24







# Dock shelter and hydraulic platforms



## Retractable dock shelter

**Self-supporting structure** made of silver coloured aluminium.

- Front made of double interwoven black PVC with a thickness of 3 mm
- Perimeter made of interwoven yellow PVC with a thickness of 1,2 mm
- Screws and accessories made of stainless steel

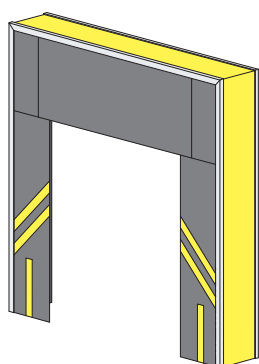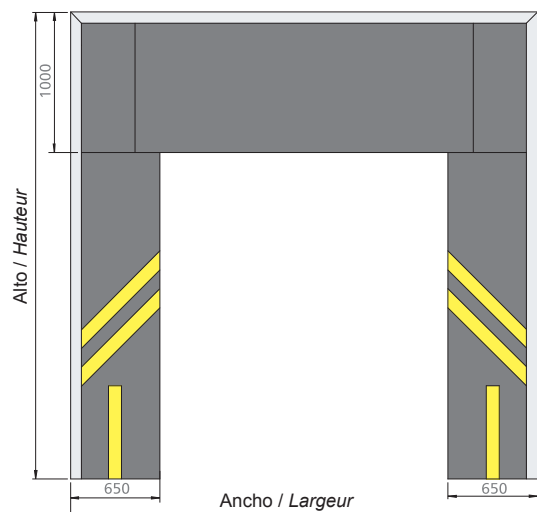




## Inflatable dock shelter

Ensures an airtightness of 98% by the inflatable pillows which adapt to the laterals of the truck.

Single measurement:  
3.510 mm width x 3.715 mm height.



## Hydraulic platforms

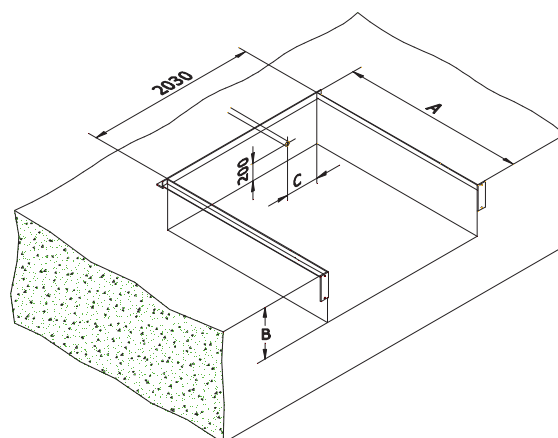

Hydraulic platform with half-automatic control system for manoeuvres, speed and breakdowns.

Available in 3 sizes.

Models	Configuration	Lenght	Width	A	B
1110000	Hydraulic	2000 mm	2000 mm	2155 mm	600 mm
1120000	Hydraulic	2600 mm		2655 mm	600 mm
1130000	Hydraulic	3000 mm		3155 mm	600 mm



Puertas frigoríficas Insulated doors Portes frigorifiques  
Kühlraumtüren Soğuk oda kapıları أبواب معزولة



### Grupo Repro

Avenida del Mar, s/n - Apartado de Correos 29

46410 SUECA (Valencia) Spain

Tel.: +34 96 171 80 05 - Fax: +34 96 170 09 00

[www.repro.es](http://www.repro.es) - [repro@repro.es](mailto:repro@repro.es)